

TUNNEL

“From dusty ride to dazzling glide”






TUNNEL

“From dusty ride to dazzling glide”

Ceccato tunnels represent the perfect balance of speed, efficiency, and uncompromising quality. Two models designed with cutting-edge technology and premium materials, engineered to deliver outstanding results, reduced consumption, maximum reliability, and washing capacity of up to 90 vehicles per hour.

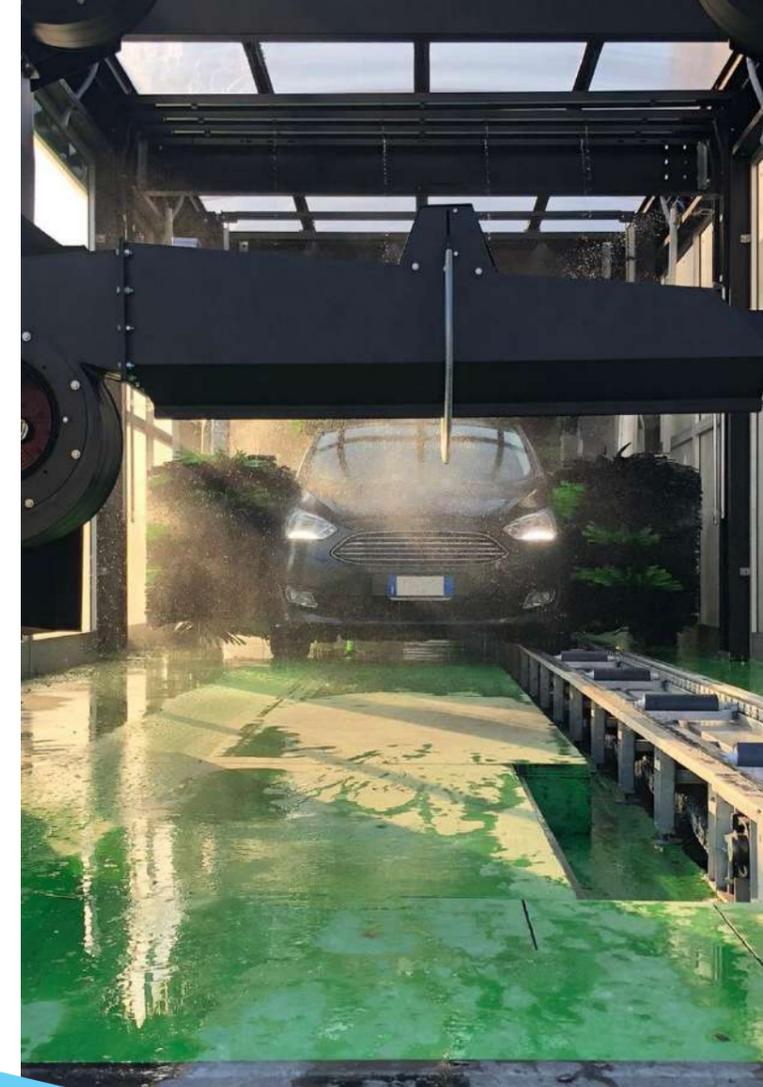

MINIMAX & HERCULES

“From compact to complete”


With Ceccato, you can choose between two tunnels tailored to your business:

- Minimax: compact and efficient, for fast and high-quality washing.
- Hercules: the fully equipped tunnel for premium performance.

HERCULES

Up to 90 cars/hour (high productivity model)

Up to 60 cars/hour (low productivity model)

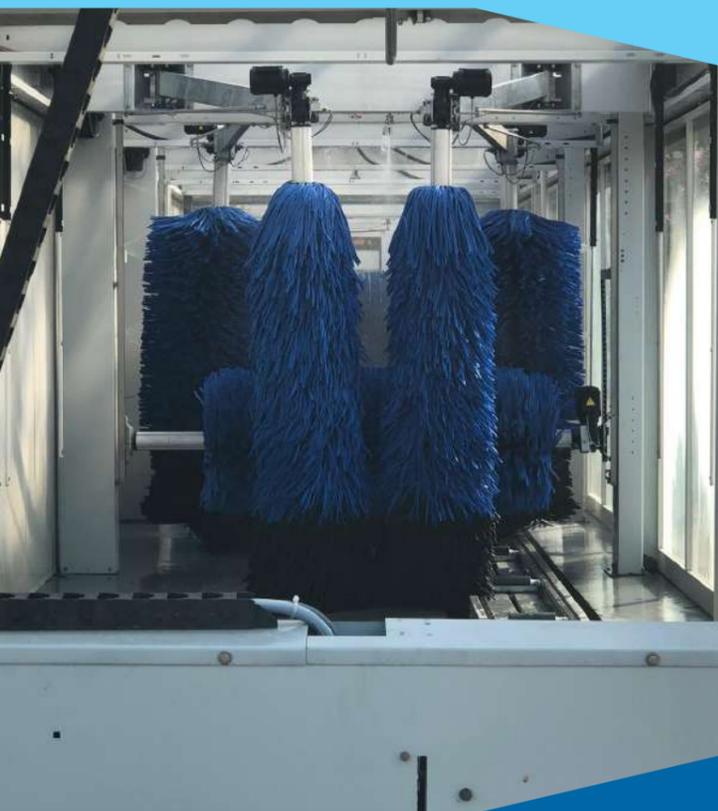

Features

- Configurable from 5 to 12 brushes
- Two types of high-pressure systems available
- Conveyor lengths from 14 to 40 meters
- Two high-capacity drying models
- Optional covering structure
- Optional drying brushes
- Operator panel with remote control interface

HERCULES DOUBLE HYDRAULIC CIRCUIT FOR RECYCLED WATER • OVERALL DIMENSIONS	
Conveyor chain length	from 14 to 40 meters
Unit width	5900mm
Unit height	4010*/5010**mm
Washing width	2200mm
Wheel runway width	350mm
Washing height	2200mm

TECHNICAL DATA	
Power supply (V)	400+- 10%
Installed power (kW)	depending on machine configuration
Frequency (Hz)	50/60
Conveyor speed	6/9 meters per minute


* without roof and gutters / ** with roof and gutters

MINIMAX


Minimum space,
maximum efficiency




Dynamic (10,4 m)

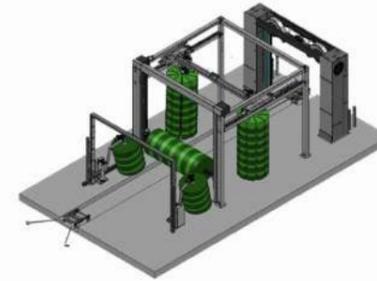

Smart (14,15 m)

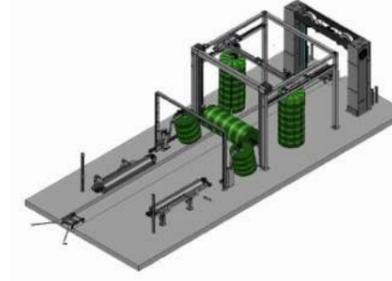

Edition (16,4 m)

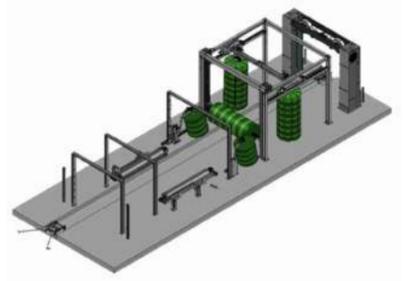

Features

- Dynamic: 5 moving brushes, drying
 - Smart: 5 moving brushes, drying, wheel wash
 - Edition: 5 moving brushes, drying, wheel wash, pre-wash foam and lateral high pressure
- Optional:
- Chassis wash
 - Premium contour-following dryer

MINIMAX DOUBLE HYDRAULIC CIRCUIT FOR RECYCLED WATER • OVERALL DIMENSIONS	
Conveyor chain length	from 9 to 16 meters
Unit width	5900mm
Unit height	4010*/5010**mm
Washing width	2200mm
Wheel runway width	350mm
Washing height	2300mm

* without roof and gutters / ** with roof and gutters

TECHNICAL DATA	
Power supply (V)	400+- 10%
Installed power (kW)	depending on machine configuration (power of basic configuration: 25)
Frequency (Hz)	50/60
Conveyor speed	3 meters per minute

Ceccato S.p.A
Via dell'Innovazione 5/7
36040 Grisignano di Zocco (VI)
info@ceccato.it
T.+39 0444 708411
F.+39 0444 708405

